




Lecture 2: RDF and RDFS

2.5 Model Building with RDFS

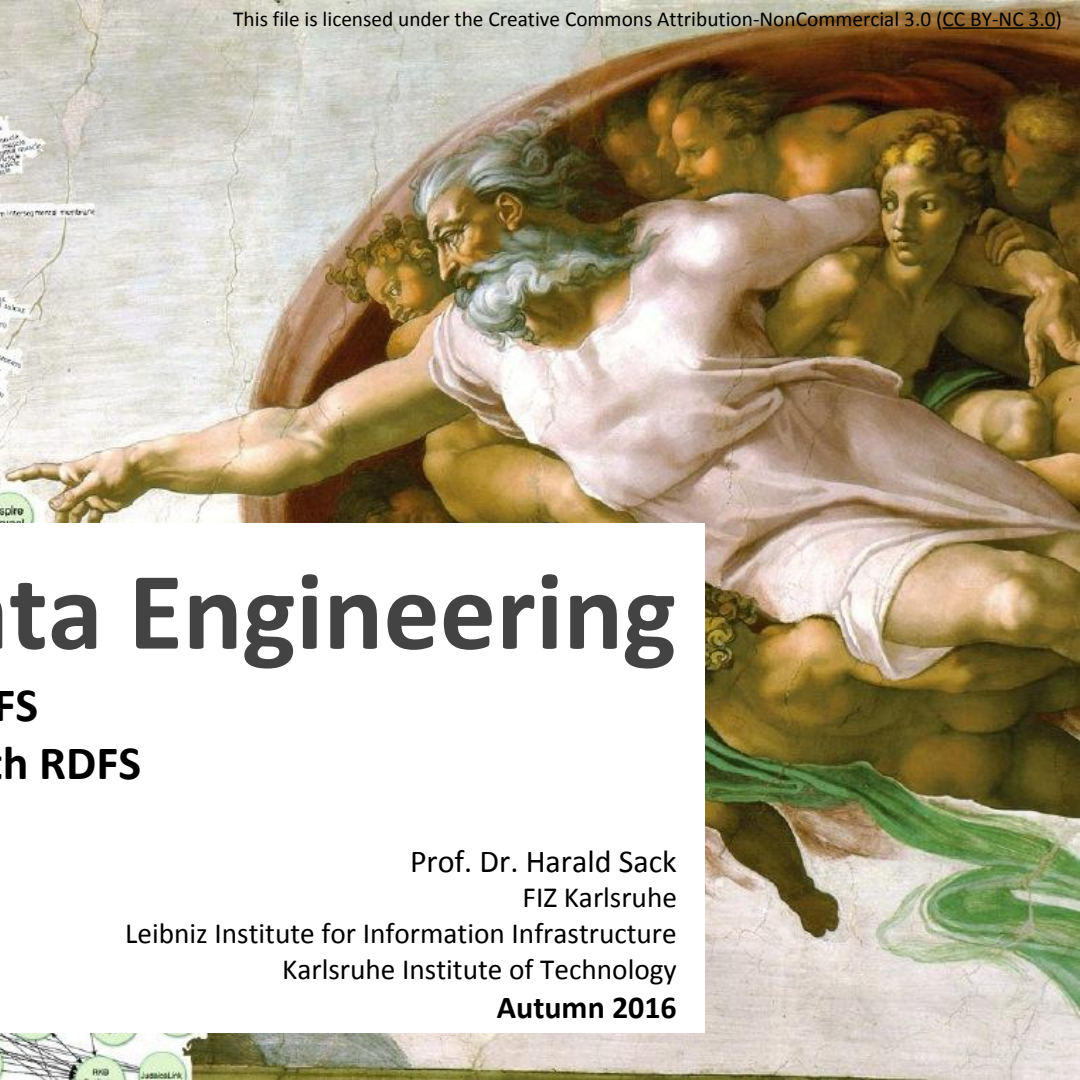

KIT
Karlsruher Institut für Technologie

Leibniz Institute for Information Infrastructure

Leibniz Institute for Information Infrastructure
Karlsruhe Institute of Technology
Autumn 2016

What does it really mean?

<http://dbpedia.org/resource/Pluto>

<http://dbpedia.org/property/satelliteOf>

[http://dbpedia.org/resource/Charon_\(moon\)](http://dbpedia.org/resource/Charon_(moon))


<http://dbpedia.org/ontology/discoverer>

http://dbpedia.org/resource/Clyde_Tombaugh

Where does the intended meaning really come from?



What does it really mean?


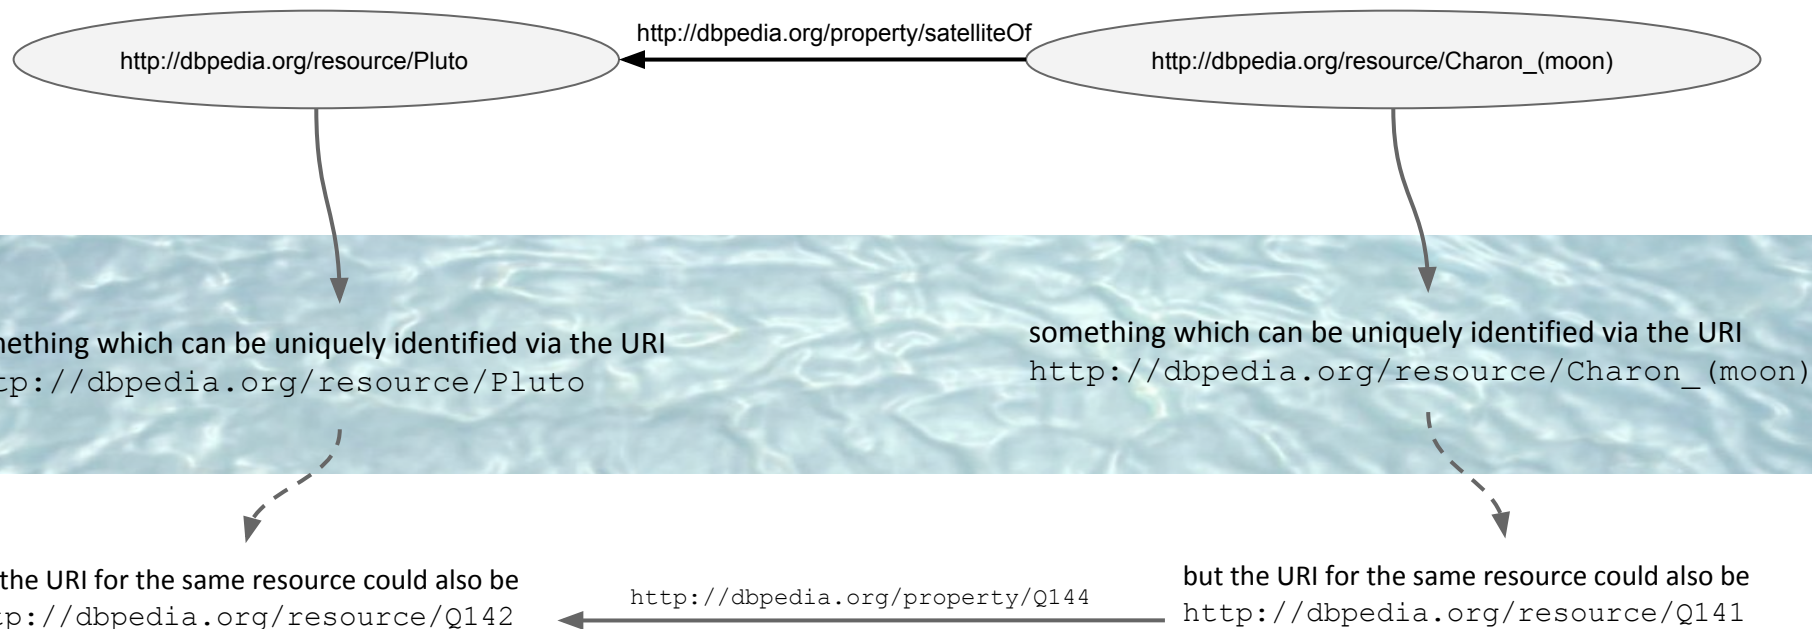


We need more semantic expressivity...

The Semantic Web Technology Stack (not a piece of cake...)

- Most apps use only a subset of the stack
- Querying allows fine-grained data access
- Standardized information exchange is key
- Formats are necessary, but not too important
- The Semantic Web is based on the Web

Linked Data uses a small selection of technologies

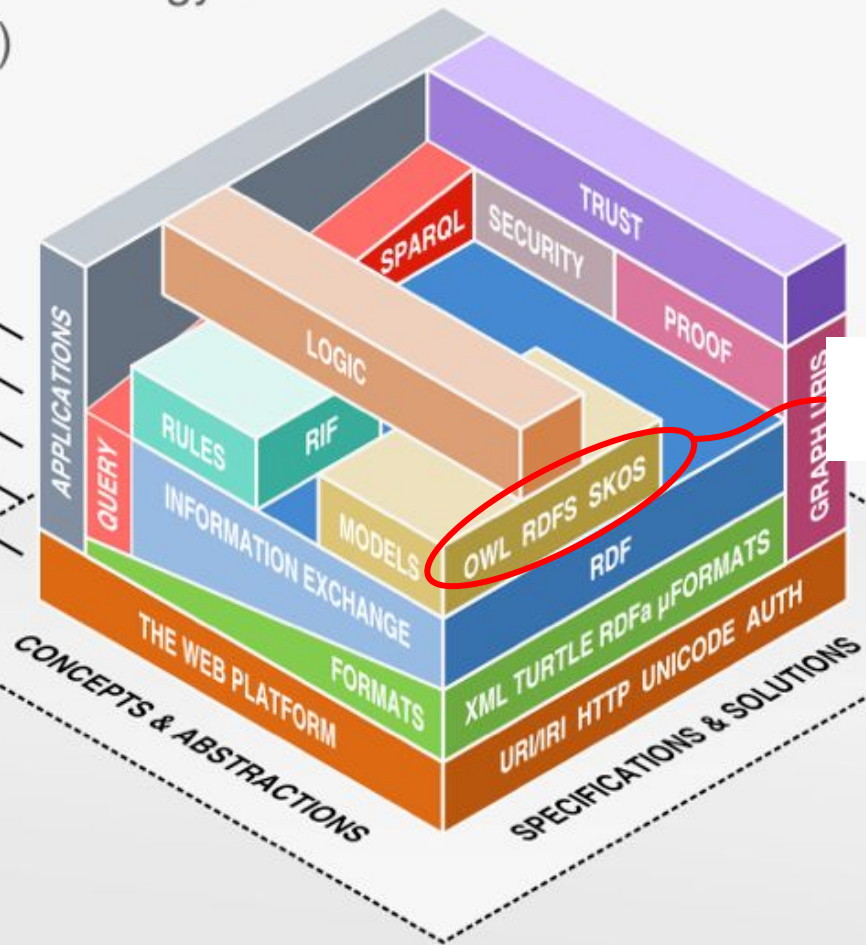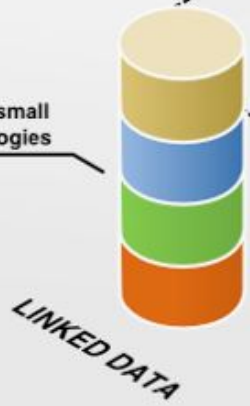

RDF Schema

RDF Schema



- **RDF Schema**, officially called “**RDF Vocabulary Description Language**”
- RDF Schema allows:
 - Definition of **classes** via **`rdfs:Class`**
 - Class instantiation in RDF via **`rdf:type`**
 - Example:
`:Planet rdf:type rdfs:Class .`
`:Earth rdf:type :Planet .`

```
@prefix rdfs: <http://www.w3.org/2000/01/rdf-schema#> .  
@prefix rdf:  <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .  
@prefix :    <http://example.org/Space#> .
```

RDF Schema



- Definition of **properties** via `rdf:Property`
- Definition of **property restrictions on domain and range** via `rdfs:domain` and `rdfs:range`
- Example

```
:CelestialBody rdf:type      rdfs:Class .  
:satelliteOf   rdf:type      rdf:Property .  
:satelliteOf   rdfs:domain   :CelestialBody .  
:satelliteOf   rdfs:range    :CelestialBody .
```

RDF Schema




- Everything in the RDF model is a **resource**
 - `rdfs:Class` `rdf:type` `rdfs:Resource` .
 - `rdf:Property` `rdf:type` `rdfs:Resource` .
 - `rdfs:Literal` `rdf:type` `rdfs:Resource` .
 - `rdfs:XMLLiteral` `rdf:type` `rdfs:Resource` .
 - `rdfs:Datatype` `rdf:type` `rdfs:Resource` .
 - `rdfs:Container` `rdf:type` `rdfs:Resource` .
 - `rdfs:ContainerMembershipProperty`
 `rdf:type` `rdfs:Resource` .

RDF Schema



- Definition of **hierarchical relationships**:
 - **Subclasses** and **superclasses** via `rdfs:subClassOf`
 - Example:
`:Planet rdfs:subClassOf :CelestialBody .`

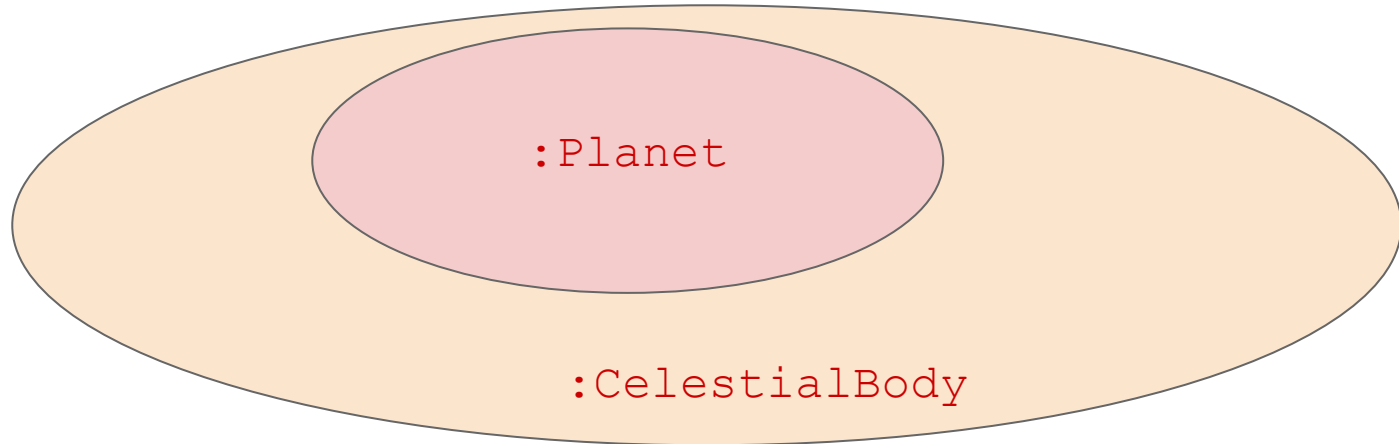


RDF Schema



- Definition of **hierarchical relationships**:
 - **Subclasses** and **superclasses** via `rdfs:subClassOf`
 - Example:
`:Planet rdfs:subClassOf :CelestialBody .`
 - **Subproperties** and **superproperties** via `subPropertyOf`
 - Example
`:artificialSatelliteOf rdfs:subPropertyOf :satelliteOf .`

RDFS Language Model

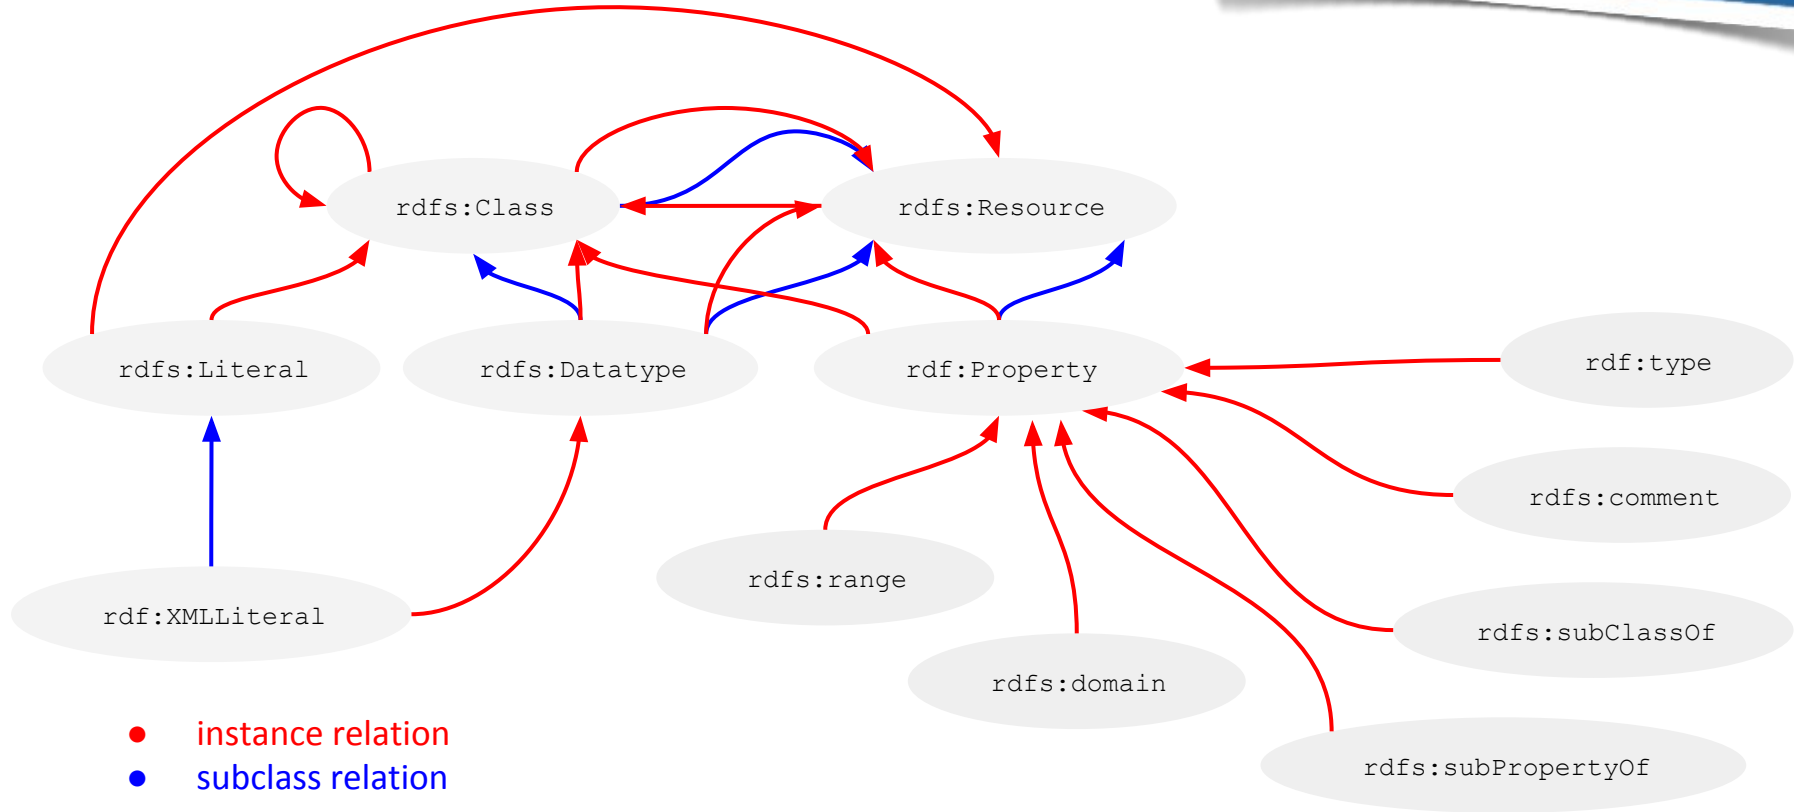

RDF Schema



- Some more properties:
 - **`rdfs:seeAlso`**
defines a relation of a resource to another, which explains it
 - **`rdfs:isDefinedBy`**
subproperty of `rdfs:seeAlso`, defines the relation of a resource to its definition
 - **`rdfs:comment`**
comment, usually as text
 - **`rdfs:label`**
„readable“ name of a resource (contrary to ID)
 - **`rdfs:member`**
super-property of all the container membership properties
(e.g. `rdf:_1`, ...)

RDFS Example

```
@prefix rdfs: <http://www.w3.org/2000/01/rdf-schema#> .  
@prefix rdf: <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .  
@prefix : <http://example.org/Space#> .
```

```
:Planet rdf:type      rdfs:Class ;  
        rdfs:subClassOf :CelestialBody .  
:Satellite rdf:type    rdfs:Class ;  
        rdfs:subClassOf :CelestialBody .  
:ArtificialSatellite rdf:type    rdfs:Class ;  
        rdfs:subClassOf :Satellite .
```

Class Definitions

```
:satelliteOf  rdf:type    rdf:Property ;  
              rdfs:domain :CelestialBody .  
              rdfs:range  :CelestialBody .
```

Property Definitions

```
:Earth  rdf:type :Planet .  
:Moon   rdf:type :Satellite ;  
        :satelliteOf :Earth .  
:Sputnik1 rdf:type :ArtificialSatellite ;  
        :satelliteOf :Earth ;  
        rdfs:label  "Sputnik 1"@en ;  
        rdfs:comment "the first artificial Earth satellite in 1957" .
```

Instance Definitions



Next: 06 - Logical Inference with RDFS

OpenHPI - Linked Data Engineering - Lecture 2: RDF and RDFS